

FIG. 1

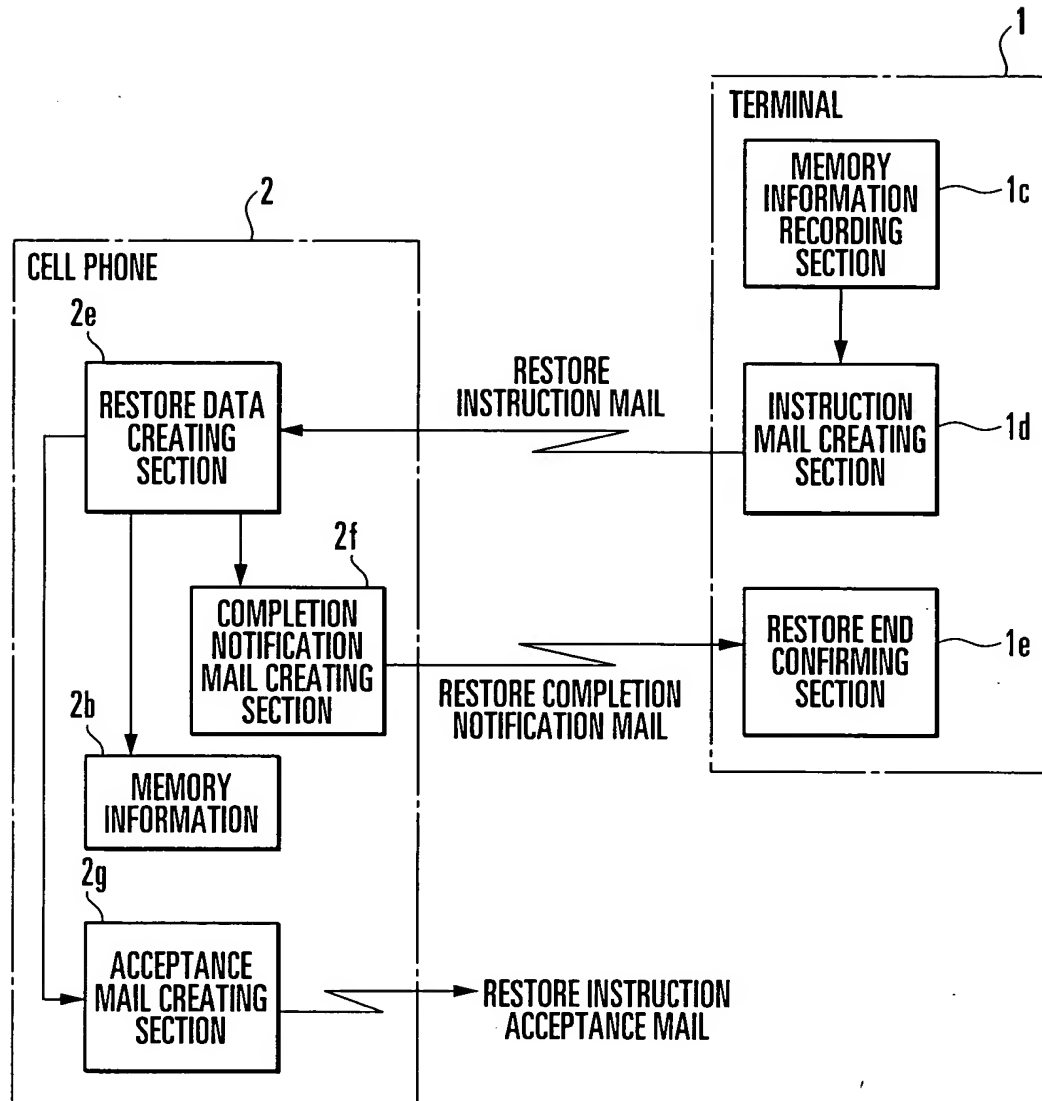


FIG. 2

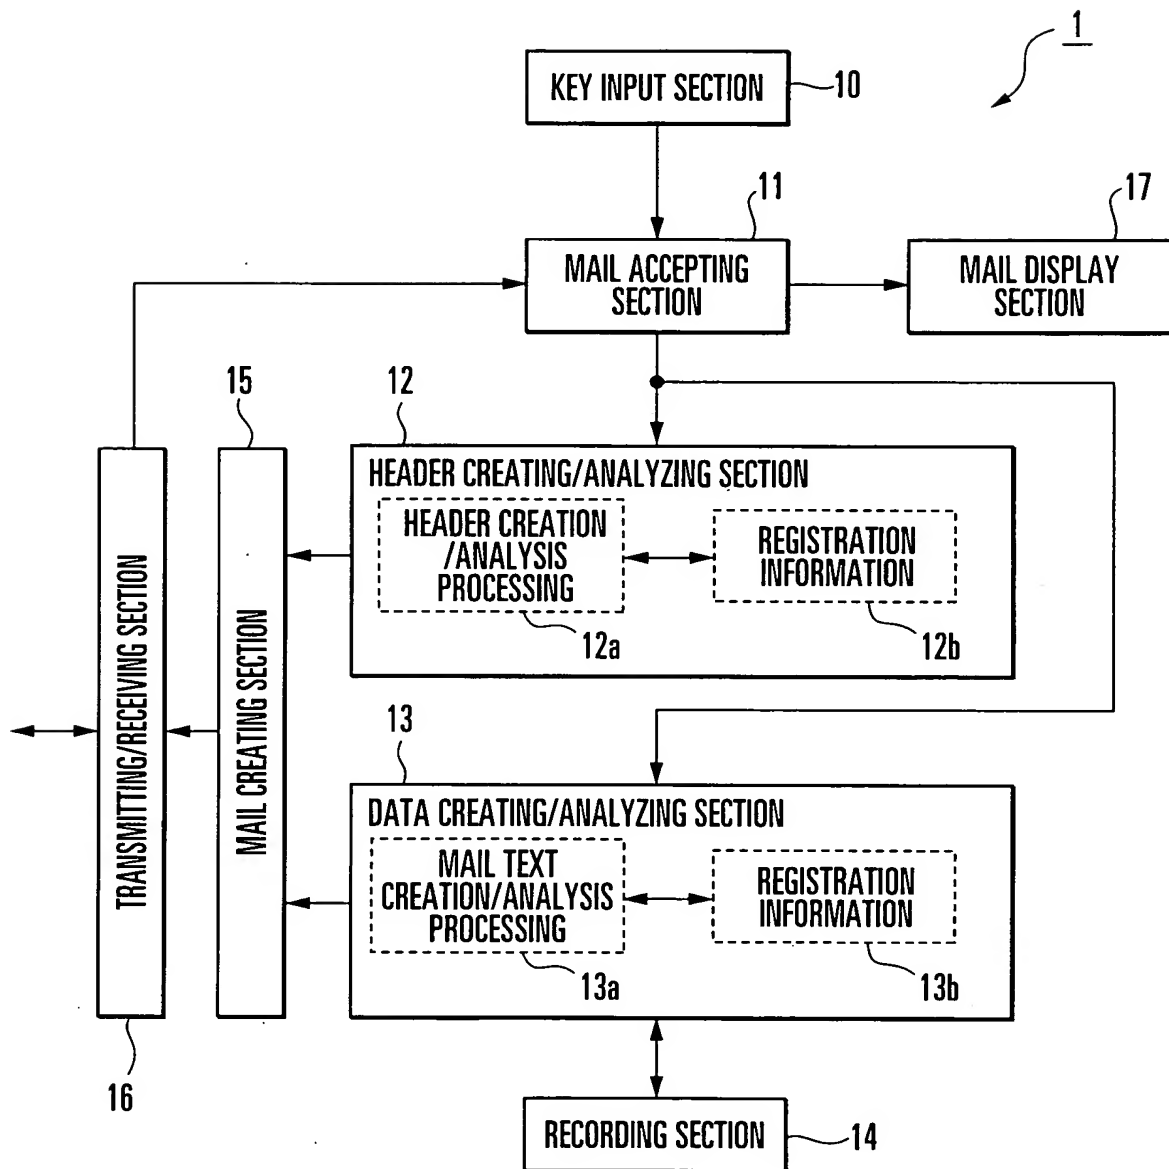


FIG. 3

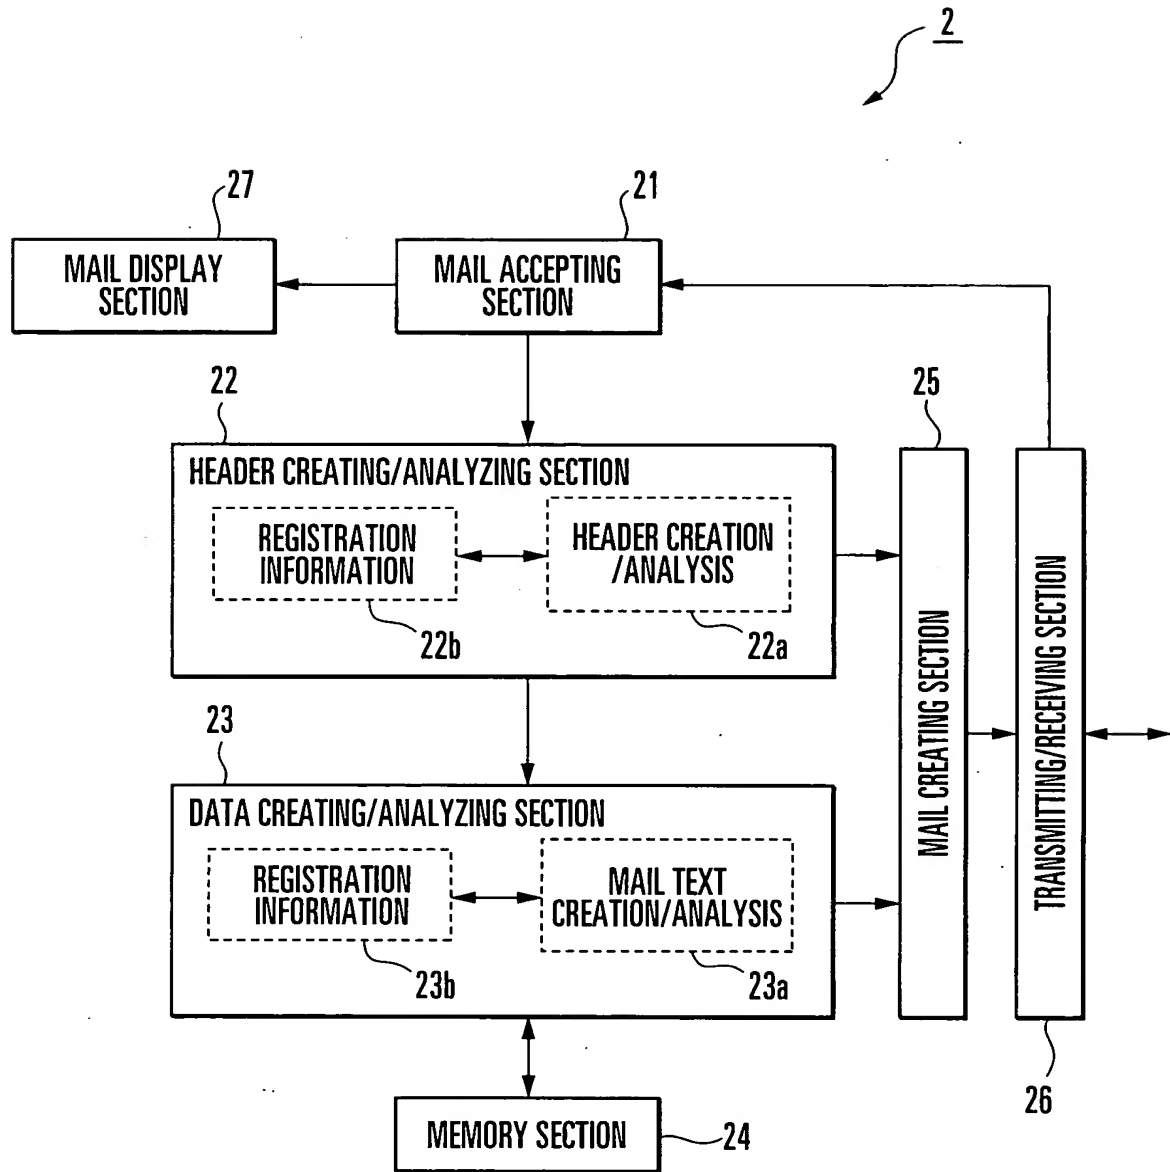


FIG. 4

### HEADER AND TEXT OF MAIL

MAIL HEADER PORTION {  
Message-[d:<00f901c27bc5\$1976e030\$eb510ac@xxx.xxx.xxx.jp>  
From: test@xxx.xxx.xxx.jp  
To: guest@xxx.xxx.xxx.jp  
Subject: TEST  
Date: Fri, 25 Oct 2002 10:23:18 + 0900  
MIME: Version: 1.0  
X: Priority: 3  
X-MSMail- Priority: Normal  
X-Mailer: Microsoft Outlook Express5.50.4807.1700  
X-MimeOLE: Produced BY Microsoft MimeOLE V5.50.4910.0300  
List-Unsubscribe:<mailto:XXXXX@xxx.xxx.xxx.jp>  
Content-Type:text/plain: charset="iso-2022-jp"  
Content-Transfer-Encoding: 7bit

MAIL TEXT { TO WHOM IT MAY CONCERN  
xxxxxxxx

FIG. 5A

### INFORMATION OF HEADER PORTION TO BE ADDED

· MB-Direction-Code: backup ← INSTRUCTION CONTENT  
· MB-Authentication-Info: xxxxxxxx ← USER AUTHENTICATION INFORMATION

MAIL HEADER PORTION {  
MB-Direction-Code: backup  
MB-Authentication-Info: xxxxxxxx  
From: test@xxx.xxx.xxx.jp  
TO: guest@xxx.xxx.xxx.jp  
Subject: backup  
:  
:

FIG. 5B

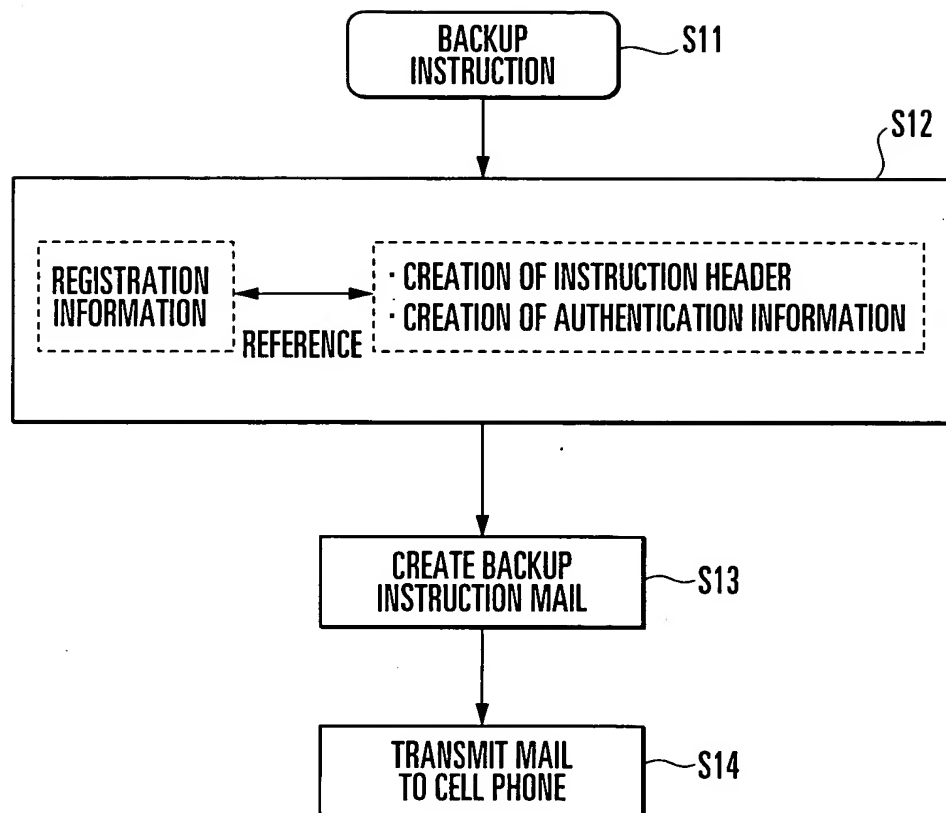


FIG. 6

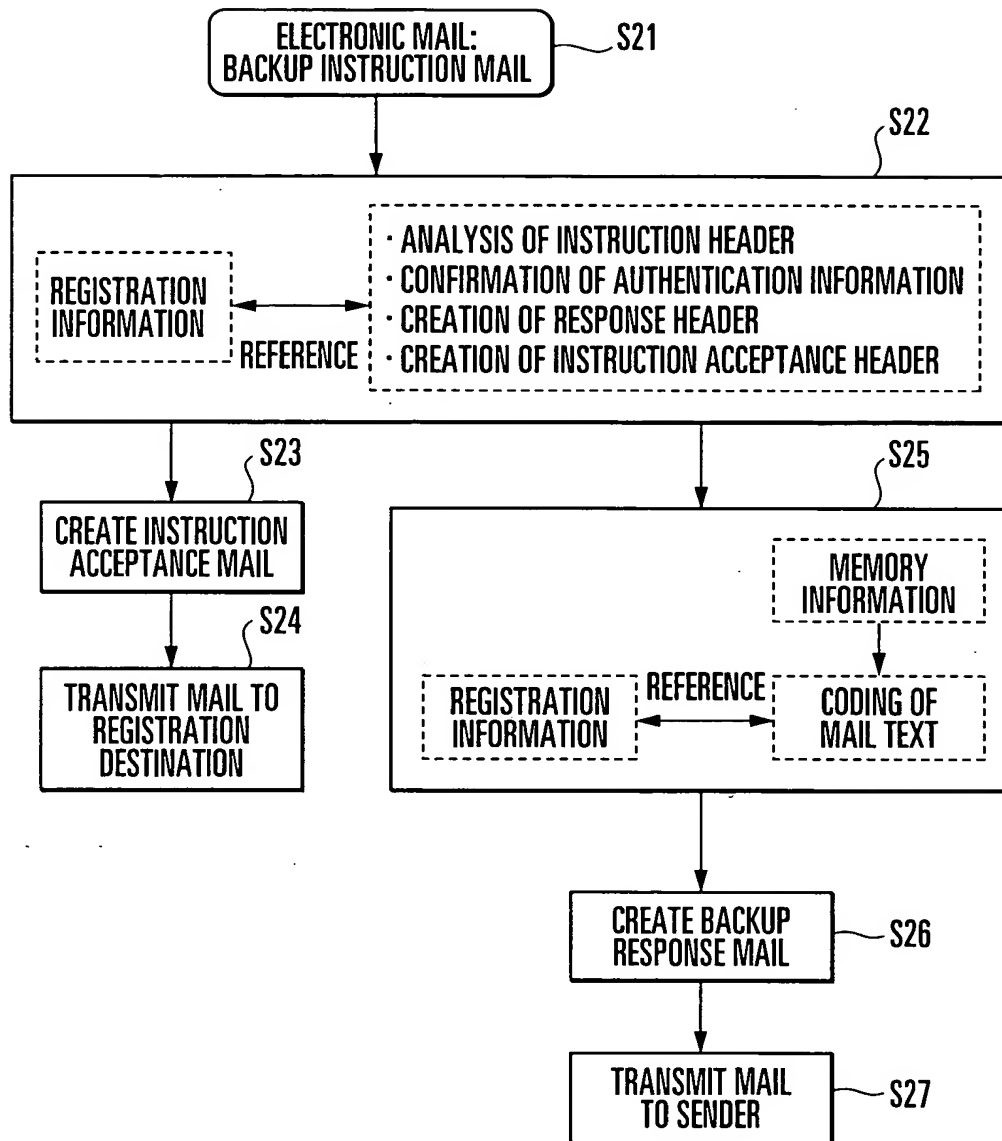


FIG. 7

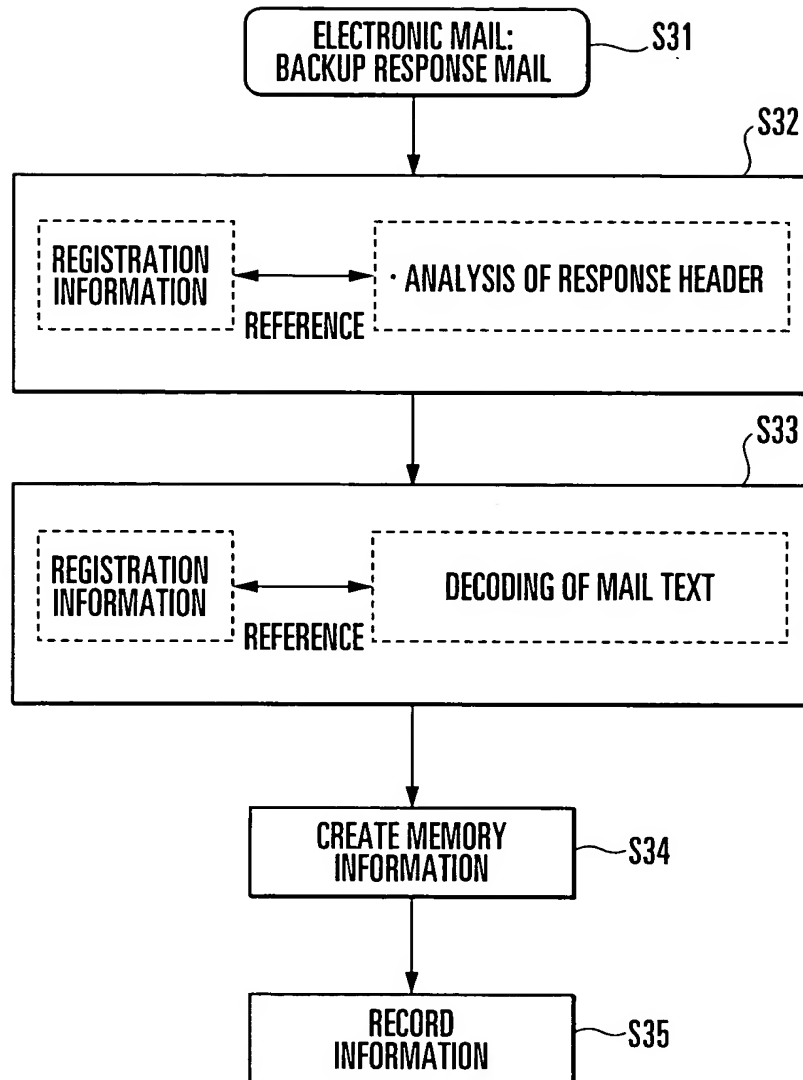


FIG. 8



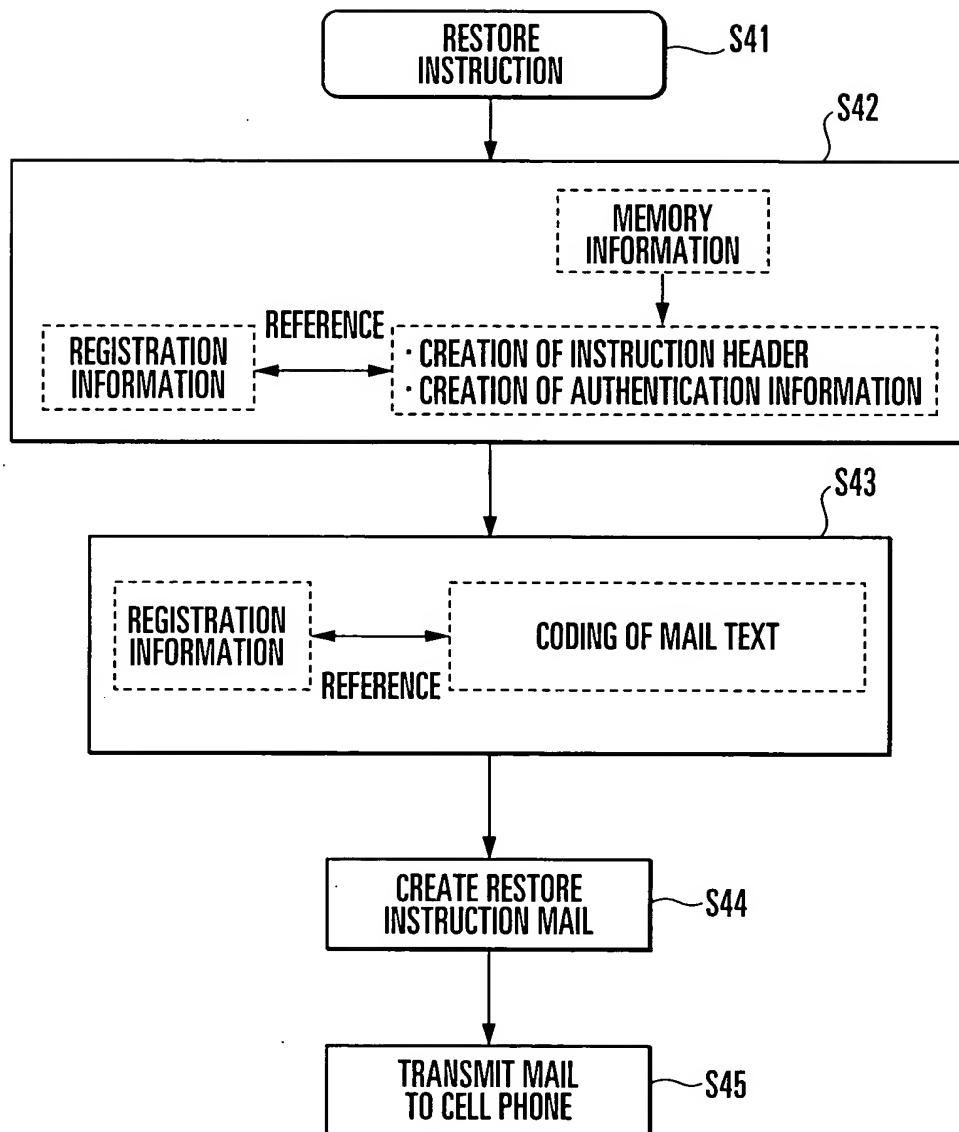


FIG. 9

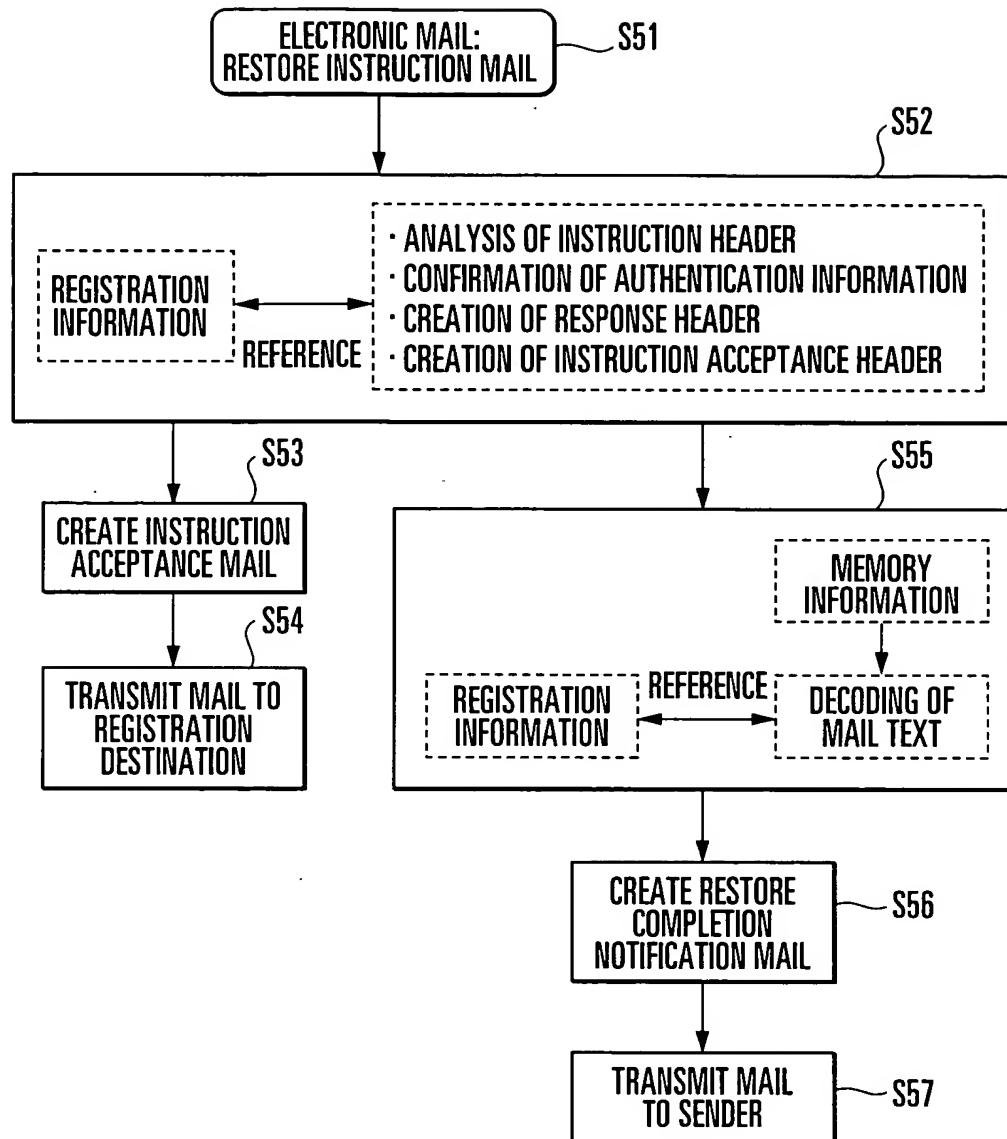


FIG. 10

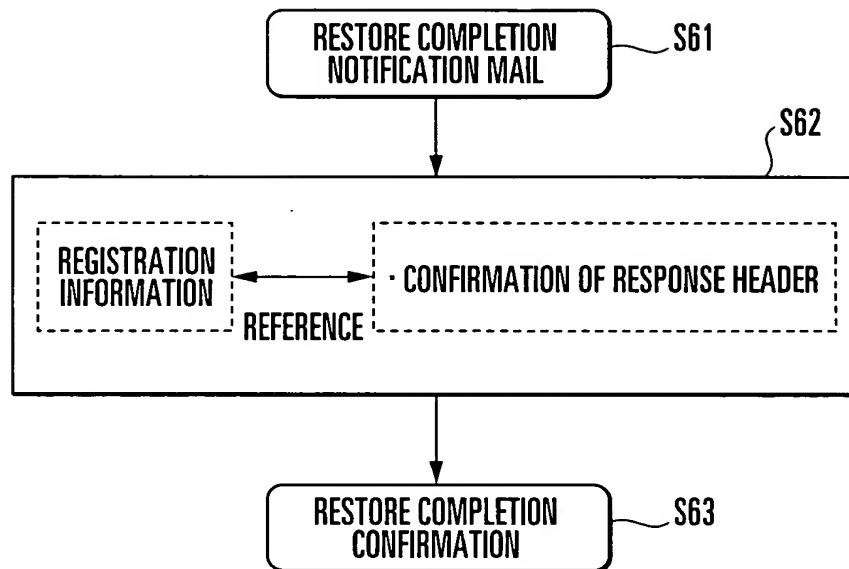


FIG. 11

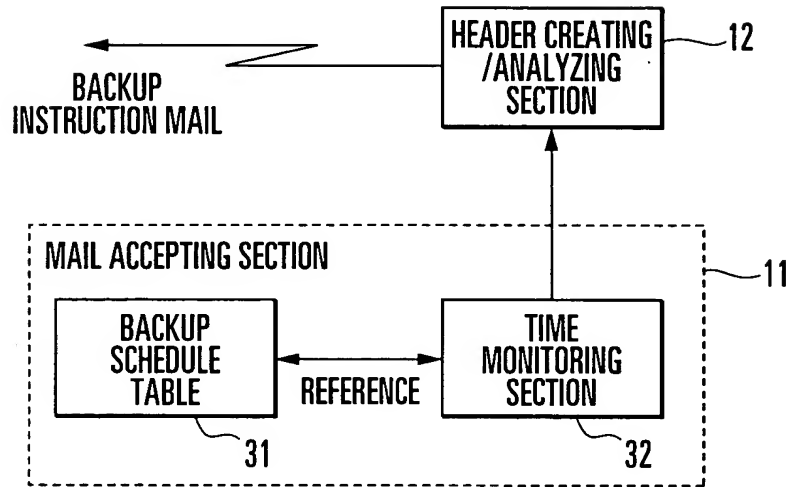


FIG. 12A

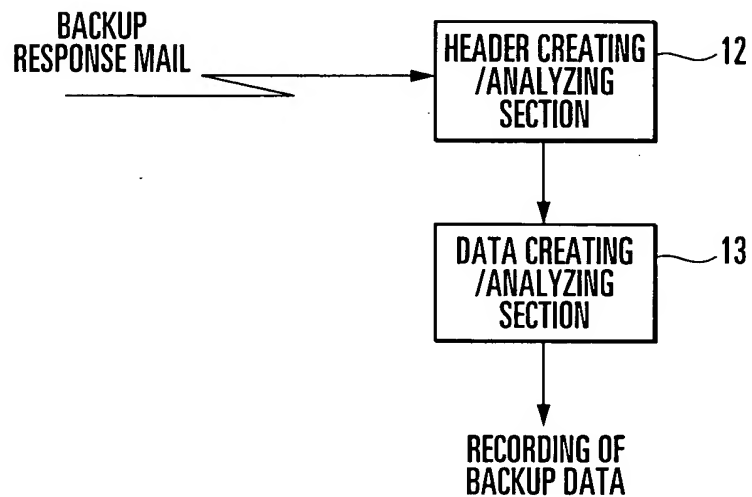


FIG. 12B